


# TECHNICAL DATA

## GLASS CLOTH TAPE

Product Code: 1G027

### P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.  
Telephone : (852) 2604-8222 \* Facsimile : (852) 2693-2093  
E-mail : sales@pleo.com \* Web Site : <http://www.pleo.com>

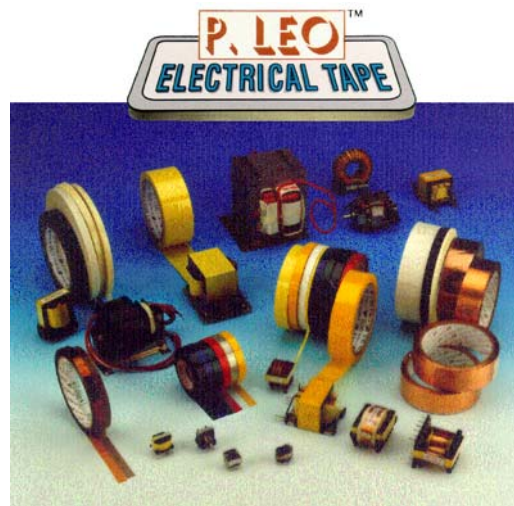

UL FILE #E126174

Description : 1G027 is a 0.13mm thick glass fiber fabric coated with Rubber thermosetting adhesive, fray-free edge-tear resistant. Can be thermoset for greater resistance to the commercial solvents used in electrical varnishes and impregnats. More protection against physical damage. Rough and absorbent surface, it is better suited for varnish impregnation.

Applications : Insulating, holding, reinforcing and protecting in the construction and repair of electrical equipment. High ability to impregnate for traction machine manufacturing, for motors and transformers. In high heat locations where other adhesives tapes cannot be used. It is used as insulation material of class B.

| Technical Details : | <u>PROPERTIES</u>     | <u>UNIT</u> | <u>SPECIFICATION</u> |
|---------------------|-----------------------|-------------|----------------------|
|                     | COLOR                 | -           | white                |
|                     | TOTAL THICKNESS       | mm          | 0.02±0.002           |
|                     | TENSILE STRENGTH      | kg/25mm     | 48                   |
|                     | ELONGATION            | %           | 5                    |
|                     | ADHESION TO STEEL     | kg/25mm     | 0.9                  |
|                     | UNWIND FORCE          | kg/25mm     | 0.7                  |
|                     | DIELECTRIC BREAKDOWN  | kV          | 2.5                  |
|                     | TEMPERATURE CLASS     | °C          | 130                  |
|                     | INSULATION RESISTANCE | ohm         | 2.5x10 <sup>8</sup>  |
|                     | CORROSION FACTOR      | -           | 0.97                 |

Test Method : In accordance with ASTM method

Shelf Life : 6 months when storage at 73 °C and 65% relative humidity

Availability : Standard 55M roll, 3" core, width 580mm

### Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or the inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

